

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

P-01,0105

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

09/830622

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/EP99/08074

26 October 1999

28 October 1998

TITLE OF INVENTION "SURFACE ACOUSTIC WAVE ARRANGEMENT WITH AT LEAST TWO SURFACE ACOUSTIC WAVE STRUCTURES"

APPLICANT(S) FOR DO/EO/US Thomas Bauer, Günter Kovacs, Ulrike Rösler and Werner Ruile

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay.
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; (PTO 1449, Prior Art, Search Report).
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. **(SEE ATTACHED ENVELOPE)**
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
 - a. ☒ Submission of Drawings - 3 sheets
 - b. ☒ Submission of Proposed Drawing Changes
 - c. ☒ EXPRESS MAIL #EL655300125US dated April 27, 2001

U.S. APPLICATION NO. (if known) 097-830622 <small>(see 37 C.F.R. 1.5)</small>		INTERNATIONAL APPLICATION NO. PCT/EP99/08074		ATTORNEY'S DOCKET NUMBER P-01,0105	
---	--	--	--	--	--

17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5): Search Report has been prepared by the EPO or JPO \$860.00 International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) ... \$670.00 No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but international search fee paid to USPTO (37 C.F.R. 1.445(a)(2)) \$760.00 Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO \$970.00 International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$ 96.00 <div style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>				CALCULATIONS		PTO USE ONLY	

Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 C.F.R. 1.492(e)).				\$			
---	--	--	--	----	--	--	--

Claims	Number Filed	Number Extra	Rate		
Total Claims	15 - 20 =	0	X \$18.00	\$	
Independent Claims	1 - 3 =	0	X \$80.00	\$	
Multiple Dependent Claims			\$270.00 +	\$	
TOTAL OF ABOVE CALCULATIONS =				\$ 860.00	

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 C.F.R. 1.9, 1.27, 1.28)				\$			
SUBTOTAL =				\$ 860.00			

Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$			
TOTAL NATIONAL FEE =				\$ 860.00			

Fee for recording the enclosed assignment (37 C.F.R. 1.21(h). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property				\$			
TOTAL FEES ENCLOSED =				\$ 860.00			

				Amount to be refunded		\$	
				charged		\$	

a. ☒ A check in the amount of \$860.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **501519**. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Schiff Hardin & Waite
Patent Department
6600 Sears Tower
Chicago, Illinois 60606-6473
Customer Number 26574

SIGNATURE
James D. Hobart
NAME
24,149
Registration Number

- 1 -

**IN THE UNITED STATES ELECTED OFFICE OF
THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY - CHAPTER II**

PRELIMINARY AMENDMENT

5 APPLICANTS: Thomas Bauer, Günter Kovacs, Ulrike Rösler and Werner Ruile

ATTORNEY

DOCKET NO.: P-01,0105

SERIAL NO.:

EXAMINER:

FILING DATE:

ART UNIT:

10 INTERNATIONAL APPLICATION NO.: PCT/EP99/08074

INTERNATIONAL FILING DATE: 26 October 1999

INVENTION: "SURFACE ACOUSTIC WAVE ARRANGEMENT WITH
AT LEAST TWO SURFACE ACOUSTIC WAVE
STRUCTURES"

15 **BOX PCT**

Assistant Commissioner for Patents
Washington, D.C. 20231

S I R:

20 Please amend the above-identified International Application before entry
into the National Stage before the U.S. Patent and Trademark Office under 35 USC
371 as follows:

IN THE SPECIFICATION:

Page 4, please replace the paragraph starting at line 17 with the following
heading and paragraph:

25 --SUMMARY OF THE INVENTION

The object of the present invention is to provide low-loss broadband filters
which avoid the above-mentioned disadvantages.--

Page 4, please replace the paragraph starting at line 20 with the following paragraphs:

--According to the invention, this object is achieved by a surface acoustic wave arrangement comprising a piezoelectric substrate; at least two surface acoustic wave structures, which are fitted on the substrate, are arranged one behind the other in the propagation direction of the surface acoustic waves, comprise metallic fingers and have a first and second finger period; the two surface acoustic wave structures having a different phase and/or different finger period; fingers at the ends of the two surface acoustic wave structures forming a junction region from a first to a second surface acoustic wave structure, and the local finger period of the first surface acoustic wave structure initially decreasing continuously in the junction region and finally rises continuously again until the finger period of the second surface acoustic wave structure is reached.

The junction region is formed by 5 to 8 fingers at the ends of the two surface acoustic wave structures. The surface acoustic wave structures can be two interdigital transducers, or a reflector in combination with an interdigital transducer, or two reflectors. Preferably, the widths of the fingers of the two structure initially decrease and increase in the junction region and the structure having metallization ratio η of 0.7 to 0.8.

The arrangement may be a dual mode surface acoustic wave filter (DMS filter), with interdigital transducers which are used as input and output transducers being arranged between two reflectors in one acoustic track, and the surface acoustic wave structures being selected from interdigital transducers and reflectors. The reflectors are connected to the ground. The metallization height of the surface acoustic wave structures is in the region from 9 to 11% of the wavelength, which is associated with the surface acoustic wave structures, of the surface acoustic waves.

The arrangement can have three interdigital transducers which are arranged one behind the other between two reflectors with the central interdigital transducer,

which is connected to a first connection, having a total of 27 to 35 electrode fingers and, in contrast, the two outer interdigital transducers, which are connected to a second connection, have a total of 20 to 24 electrode fingers. The distances between the central interdigital transducer and the two outer interdigital transducers are of different magnitude.

The arrangement can be in the form of a two-track arrangement, with the finger periods of the reflectors in the two tracks being of different magnitude. The arrangement can be in the form of a reactance filter with single-port resonators, with a junction between the different finger periods of an interdigital transducer and a reflector in at least one single-port resonator. --

Page 6, please replace the paragraph starting at line 30 with the following paragraph and heading:

--The invention will be explained in more detail in the following text, with reference to exemplary embodiments and the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS--

Page 7, please replace the paragraph starting at line 13 with the following paragraph and heading:

--Figure 5 is a graph showing a comparison of the pass characteristic of filters according to the invention and known filters, based on measured curves.

DESCRIPTION OF THE PREFERRED EMBODIMENTS--.

IN THE ABSTRACT:

Please replace the Abstract on the unnumbered page following page 14 with the attached unnumbered page containing an Abstract of the Disclosure.

IN THE CLAIMS:

Please cancel claims 1-15 on Amended Sheets 12, 12a, 13, 13a and 14, and add the following claims:

5 --16. A surface acoustic wave arrangement comprising a piezoelectric
substrate; at least two surface acoustic wave structures being fitted on the substrate,
said structures being arranged one behind the other in a propagation direction of the
surface acoustic waves and having metallic fingers with a first and second finger
period, said two surface acoustic wave structures having differences selected from
different phase, different finger period, and a combination of different phase and
10 different finger period; fingers at the ends of the two surface acoustic wave structures
forming a junction region from a first of the two surface acoustic wave structures to
a second of the two surface acoustic wave structures, the local finger period of the
first surface acoustic wave structure initially decreasing continuously in the junction
region and finally rising continuously again until the finger period of the second
15 surface acoustic wave structure is reached.--

 --17. A surface acoustic wave arrangement according to claim 16, wherein
the junction region is formed by 5 to 10 fingers and the ends of the two surface
acoustic wave structures.--

20 --18. A surface acoustic wave arrangement according to claim 16, wherein
at least one of the two surface acoustic wave structures is in the form of an
interdigital transducer.--

 --19. A surface acoustic wave arrangement according to claim 18, wherein
a second surface acoustic wave structure is in the form of a reflector.--

--20. A surface acoustic wave arrangement according to claim 16, wherein the two surface acoustic wave structures are in the form of reflectors.--

--21. A surface acoustic wave arrangement according to claim 16, wherein the width of the fingers of the surface acoustic wave structure initially decreases and then increases again in the junction region.--

--22. A surface acoustic wave arrangement according to claim 16, wherein the surface acoustic structure has a metallization ratio η of 0.7 to 0.8.--

23. A surface acoustic wave arrangement according to claim 16, wherein the arrangement is in the form of a dual mode surface acoustic wave filter with interdigital transducers which are used as input and output transducers being arranged between two reflectors in one acoustic track, the surface acoustic wave structures being selected from interdigital transducers and reflectors.--

--24. A surface acoustic wave arrangement according to claim 23, wherein the reflectors are connected to ground.--

--25. A surface acoustic wave arrangement according to claim 23, wherein a metallization height of the surface acoustic wave structures is in a range of 9 to 11% of the wavelength of the surface acoustic wave structures.--

--26. A surface acoustic wave arrangement according to claim 16, wherein the substrate is selected from a 42° red YX-LiTaO₃ substrate and a 36° red YX-LiTaO₃ substrate.--

--27. A surface acoustic wave arrangement according to claim 16, which includes three interdigital transducers which are arranged one behind the other between two reflectors with the central interdigital transducer being connected to a first connection having a total of 27 to 35 electrode fingers and the two outer interdigital transducers being connected to a second connection and having a total of 20 to 24 electrode fingers.--

--28. A surface acoustic wave arrangement according to claim 27, wherein a distance between the central interdigital transducer and the two outer interdigital transducers are of different magnitude.--

--29. A surface acoustic wave arrangement according to claim 16, which is in the form of a two-track arrangement with the finger periods of the reflectors and the two tracks being of different magnitude.--


--30. A surface acoustic wave arrangement according to claim 16, which is in the form of a reactance filter with single-port resonators with a junction between the different finger periods of the interdigital transducer and a reflector in at least one single-port resonator.--

REMARKS

Claims 16-30 are presented for examination.

By this amendment, the specification has been amended to add headings, to correct grammatical errors and to specifically recite structure which was referred to as being "according to the claims". The Abstract has been amended to place it in U.S. form and to remove terms such as "invention". The changes to the specification are attached herewith in a marked-up version. Claims 1-15 have been rewritten as claims 16-30 to remove element numbers in the claims and to place the claims in form for examination in the United States Patent Office. It is respectfully submitted that these amendments do not change the indication of allowability set forth in the Preliminary Examination Report of October 19, 2000.

Respectfully submitted,

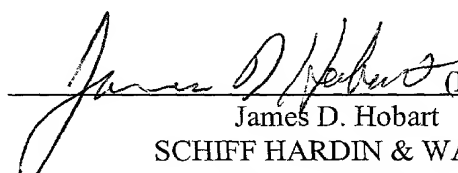 (Reg. No. 24,149)
James D. Hobart
SCHIFF HARDIN & WAITE
Patent Department
6600 Sears Tower
233 South Wacker Drive
Chicago, Illinois 60606
Telephone: (312) 258-5781
Customer Number 26574

DATED: April 27, 2001

ABSTRACT OF THE DISCLOSURE

In order to reduce scattering losses during the transmission of a surface acoustic wave signal, a surface acoustic wave arrangement has a junction between two mutually offset surface acoustic wave structures designed so that the finger period is reduced in the region of the junction, and varies continuously in the region of the junction.

5

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE SPECIFICATION:

Page 4, paragraph starting at line 17:

--SUMMARY OF THE INVENTION

5 The object of the present invention is [thus] to provide low-loss broadband filters which avoid the above-mentioned disadvantages [mentioned above].--

Page 4, paragraph starting at line 20:

10 --According to the invention, this object is achieved by a surface acoustic wave arrangement [as claimed in claim 1. Further refinements of the invention are described in the dependent claims.] comprising a piezoelectric substrate; at least two surface acoustic wave structures, which are fitted on the substrate, are arranged one behind the other in the propagation direction of the surface acoustic waves, comprise metallic fingers and have a first and second finger period; the two surface acoustic wave structures having a different phase and/or different finger period; fingers at the

15 ends of the two surface acoustic wave structures forming a junction region from a first to a second surface acoustic wave structure; and the local finger period of the first surface acoustic wave structure initially decreasing continuously in the junction region and finally rises continuously again until the finger period of the second surface acoustic wave structure is reached.

20 The junction region is formed by 5 to 8 fingers at the ends of the two surface acoustic wave structures. The surface acoustic wave structures can be two interdigital transducers, or a reflector in combination with an interdigital transducer, or two reflectors. Preferably, the widths of the fingers of the two structure initially

decrease and increase in the junction region and the structure having metallization ratio η of 0.7 to 0.8.

5 The arrangement may be a dual mode surface acoustic wave filter (DMS filter), with interdigital transducers which are used as input and output transducers being arranged between two reflectors in one acoustic track, and the surface acoustic wave structures being selected from interdigital transducers and reflectors. The reflectors are connected to the ground. The metallization height of the surface acoustic wave structures is in the region from 9 to 11% of the wavelength, which is associated with the surface acoustic wave structures, of the surface acoustic waves.

10 The arrangement can have three interdigital transducers which are arranged one behind the other between two reflectors with the central interdigital transducer, which is connected to a first connection, having a total of 27 to 35 electrode fingers and, in contrast, the two outer interdigital transducers, which are connected to a second connection, have a total of 20 to 24 electrode fingers. The distances between
15 the central interdigital transducer and the two outer interdigital transducers are of different magnitude.

20 The arrangement can be in the form of a two-track arrangement, with the finger periods of the reflectors in the two tracks being of different magnitude. The arrangement can be in the form of a reactance filter with single-port resonators, with a junction between the different finger periods of an interdigital transducer and a reflector in at least one single-port resonator. --

Page 6, paragraph starting at line 30:

--The invention will be explained in more detail in the following text, with reference to exemplary embodiments and the [five associated figures, in which:]
25 drawings.

- 3 -

BRIEF DESCRIPTION OF THE DRAWINGS--

Page 7, paragraph starting at line 13:

--Figure 5 is a graph showing [shows] a comparison of the pass
characteristic of filters according to the invention and known filters, based on
5 measured curves.

DESCRIPTION OF THE PREFERRED EMBODIMENTS--.

Description

Surface acoustic wave arrangement having at least two surface acoustic wave structures

5

The invention relates to surface acoustic wave arrangements having at least two surface acoustic wave structures which are adjacent in the main wave propagation direction and in which the period of the fingers in the first surface acoustic wave structure is different to that of the fingers in the second surface acoustic wave structure, and/or they are shifted in phase with respect to one another.

In addition to the normal propagation losses, broadband losses occur, due to partial conversion of the surface acoustic wave into volume waves, at the junction between two surface acoustic wave structures which are different or are phase-shifted with respect to one another. The conversion losses in this case increase as the metallization height increases. This is described, for example, in an article by Yasuo Ebata, "SUPPRESSION OF BULK-SCATTERING LOSS IN SAW RESONATOR WITH QUASI-CONSTANT ACOUSTIC REFLECTION PERIODICITY" in Ultrasonics Symposium 1988, pp. 91-96.

This situation occurs, in particular, when

- the two lattice elements (surface acoustic wave structures) differ in terms of period length, metallization ratio and/or layer thickness, or
- the distance between the two surface acoustic wave structures is chosen such that the two lattice elements are phase-shifted with respect to one another.

With many filter techniques, such discrepancies from perfect periodicity are essential for the method of operation of the filter (for example: DMS filter). It has thus been proposed, in DE 42 12 517, that the junction between the two surface acoustic wave structures be designed to be quasi-periodic. However,

this technique has been found to be sufficiently successful only if the relative difference between the speeds of the surface acoustic wave and the interfering volume wave is considerably greater than the relative useful bandwidth of the filter, as is the case, for example, with narrowband IF filters on quartz. This is the only situation where the interference of the parasitic volume wave with the transfer function is outside the pass band of the filter and thus does not interfere with the filter response.

However, low-loss filters having a broader bandwidth are required for telecommunications networks based on the EGSM Standard or for PCS/PCN.

DMS filters (double mode surface acoustic wave filters) are frequently used as low-loss, broadband filters with high selectivity for RF purposes, for example on a 42° red YX-LiTaO₃ substrate or on a 36° red YX-LiTaO₃.

One example of a simple single-track DMS filter is illustrated schematically in figure 1. This filter in this case comprises a track having input transducers E1 and E2, which are arranged between two reflectors R1 and R2, and the output transducer A. The connections for the input and output transducers can also be interchanged, with A then representing the input transducer, and E1, E2 the output transducers. It is also possible to connect the output transducer, or else the output transducers, of this one track to the input transducer, or input transducers, of a second, parallel track. This allows the selectivity of the filter to be increased.

DMS filters have two separate resonant frequencies within one acoustic track, which define a transmission band. The left-hand edge of the transmission band is governed by the lattice period, while the right-hand edge comes about due to the resonance between two mutually shifted surface acoustic wave structures (input and output transducers). In

comparison to a periodic lattice, these two structures have been shifted through a Δx of approximately $\lambda/4$

with respect to one another. The distance Δx in this case relates to the finger centers of adjacent (electrode) fingers of the surface acoustic wave structures. In practice, one of the two end fingers is preferably broadened by approximately $\lambda/4$, as is shown in figure 1 for the output transducer A at the junction to the two input transducers E1 and E2. This is done in order to fill the gap between the two structures with a metallized surface, since any surface leakage wave is carried better under a metallized surface.

This results in a structure having a greatly broadened finger, which has a considerably greater local lattice period p (defined by the distance between the center points of the two free surfaces to the left and right of the finger) than the other fingers. This represents a considerable disturbance with the periodic lattice. Figure 2 shows, schematically, the profile of the finger period p in the region of the junction between two such transducer structures (surface acoustic wave structures) plotted against the position coordinate x , the propagation direction of the surface acoustic waves.

In mobile radio systems (for example GSM, nominal bandwidth 25 MHz) which have been used until now, it has admittedly been possible to identify the acoustic losses in the form of volume wave emission at the structure junctions, but this has not been so severely pronounced for the provision of low-loss filters to be possible. However, broader bandwidths will be used in future mobile radio systems, in order to provide more channels (for example EGSM, nominal bandwidth 35 MHz).

Normally, the bandwidth of surface acoustic wave filters is increased by increasing the metallization layer thicknesses and reducing the number of fingers. Both measures increase the losses at the junctions between the structures. In practice, these losses result in a reduction in the Q-factor of

the transducer/transducer resonance, which defines the right-hand

band edge, and thus in a reduction in the upper pass band range.

Particularly in the case of EGSM filters, the influence of the losses is so great that the reduction
5 in the upper pass band must be compensated for by means of additional, external matching elements. The external matching can admittedly reduce the amount of ripple in the pass band, but a significant remaining disadvantage is the increased insertion loss of such filters
10 resulting from the losses at the junctions. The specification required for EGSM, for example, can also only partially be satisfied. External matching networks are, furthermore, always associated with additional costs, weight, surface area on the circuit and
15 production complexity, and are thus undesirable for most users.

The object of the present invention is thus to provide low-loss broadband filters which avoid the disadvantages mentioned above.

20 According to the invention, this object is achieved by a surface acoustic wave arrangement as claimed in claim 1. Further refinements of the invention are described in the dependent claims.

The invention results in a reduction in the
25 transmission losses of the filter, which is evident in the improved insertion loss and, in particular, in the upper half of the pass band. The useful bandwidth is thus increased, and there is no need for any external matching networks.

30 When designing broadband, low-loss surface acoustic wave filters (for example RF filters for EGSM or PCS/PCN on 42° red YX-LiTaO₃), the inventors found that additional losses, in the form of conversion to volume waves, also occur in a quasi-periodic lattice if
35 the local period at the junction is greater than in the two structures on both sides of the junction. In contrast to a hard transition,

with an abruptly increased finger period, this conversion does not, however, occur below a characteristic onset frequency, which is inversely proportional to the local period of the lattice.

5 The losses at the junctions between surface acoustic wave structures with a different phase and/or a different finger period are thus considerably reduced, or entirely avoided, in that, according to the invention, a finger period which is less than the
10 finger period of the adjacent surface acoustic wave structures is used at the junction points. This results in the onset frequency for volume wave emission being above the desired transmission band of the filter. The junction between the surface acoustic wave structures
15 is quasi-periodic, that is to say a quasi-periodic structure is formed in the region of the wave junction between two surface acoustic wave structures, which quasi-periodic structure forms a continuous transition between the finger period p and/or the phase of the
20 first surface acoustic wave structure in that of the second surface acoustic wave structure.

Depending on the extent of the discontinuity at the junction, a quasi-periodic junction region is formed having a sufficiently large number of fingers. A
25 total of 3-4 fingers at the ends of each surface acoustic wave structure has been found to be sufficient to suppress the losses even for very severe discontinuities. The junction region should not necessarily be chosen to be greater than is required to
30 avoid losses since, otherwise, this will have a negative effect on the transmission response of the filter.

The desired junction according to the invention is achieved if the finger period of the first surface
35 acoustic wave structure initially decreases continuously in the junction region and finally rises continuously again until the finger period of the second surface acoustic wave structure is reached.

For the purposes of the invention, the term surface acoustic wave structure covers both interdigital transducers and reflectors. Junctions may therefore occur, and be designed according to the invention, not only between two interdigital transducers, but also between an interdigital transducer and a reflector, and between two reflectors. The invention can thus advantageously be used, in particular, for DMS filters and single-port resonators. In the latter, the reflectors have a different (greater) finger period than the interdigital transducer.

The finger width and the finger spacing are reduced continuously in order to reduce the finger period in the junction region.

The choice of a metallization ratio η (η = ratio of the metallized surface to the unmetallized surface area within one period of the surface acoustic wave structure) between 0.7 and 0.8 reduces the speed of the surface leakage wave, as a result of which the separation between the onset frequency for volume wave conversion and the pass band is further increased. This therefore also reduces the influence of volume wave losses.

Reduced transmission losses are likewise achieved if the reflectors of the surface acoustic wave arrangement are connected to ground, since this results in a considerable reduction in the lossy exchange of charge within the reflector.

The invention will be explained in more detail in the following text, with reference to exemplary embodiments and the five associated figures, in which:

Figure 1 shows a known single-track DMS filter.

Figure 2 shows the profile of the finger period of the known filter (see figure 1) along the position coordinate.

Figure 3 shows the profile of the finger period for a surface acoustic wave arrangement according to the invention.

5 Figure 4a shows two surface acoustic wave structures having a hard transition, in which,

10 Figure 4b a surface acoustic wave arrangement having a junction according to the invention between two surface acoustic wave structures is shown for comparison.

15 Figure 5 shows a comparison of the pass characteristic of filters according to the invention and known filters, based on measured curves.

Figure 1 shows a known single-track DMS filter, in which two parallel-connected input transducers E1, E2, with an output transducer A between them, are arranged between two reflectors R1 and R2. In and Out denote the electrical connections for the input and output. The finger period p , which is a measure of the distances between the fingers, is defined in the following text as the distance which extends from the center of the free space between two fingers to the center of the next free space between two adjacent fingers. In the illustrated DMS filter, the output transducer A is shifted with respect to the two input transducers E1 and E2, with the finger period in each case having a discontinuity at the E1/A and A/E2 junctions between two mutually shifted transducers.

Figure 2 shows the profile of the finger period for these transducers in the region of the junction between transducer E1 and the transducer A. The shift of the two transducers with respect to one another is expressed in an abruptly rising finger period which then falls, likewise abruptly, once again to a constant value. The same hard transition can be seen between the

two transducers A and E2 which have been shifted with respect to one another. The two outer end fingers of the transducer A have been broadened in order to fill the gap between the two structures with a metallized

surface. The disadvantages which result from such a discontinuity in the profile of the finger period at the junction between two surface acoustic wave structures (in this case two transducers) have already
5 been explained in the introduction.

Figure 3 shows the profile of the finger period p for a surface acoustic wave arrangement according to the invention, in the region of the junction between a first surface acoustic wave structure $St1$ and a second
10 surface acoustic wave structure $St2$. The finger period p varies continuously in the region of the junction, where it also has a lower value than in either of the two structures $St1$ or $St2$. Outside the junction region, that is to say within the two structures $St1$ and $St2$,
15 the finger period assumes a constant value, which may differ from one surface acoustic wave structure to another surface acoustic wave structure. The surface acoustic wave structure may in this case be an interdigital transducer or a reflector, in which case
20 the junction may occur between a transducer and a transducer, or between a transducer and a reflector.

Figure 4 uses an exemplary embodiment to show how the junction between two mutually shifted surface acoustic wave structures $St1$ and $St2$ may be configured
25 according to the invention. For comparison, figure 4a shows a known hard transition, as has already been described with reference to figure 1. In this case, one of the two boundary fingers has been broadened. Figure 4b shows the junction designed according to the
30 invention. The finger period p has in this case been reduced continuously over the last three fingers of the structure $St1$, and likewise rises continuously once again over the outermost three fingers in the adjacent structure $St2$. This arrangement considerably reduces
35 the scattering losses at the junction between the two structures, in comparison to a known arrangement with a hard transition.

Furthermore, a junction designed according to the invention and, for example, as shown in figure 4b, is simple to manufacture since neither the

finger widths nor the finger spacings differ too severely from "normal" finger widths and finger spacings.

Figure 5 shows the transmission curves for three surface acoustic wave filters which have surface acoustic wave structures that have been shifted with respect to one another. The DMS filter illustrated in figure 1 is used as an example, whose transmission response is shown by the transmission curve 1 in figure 5. The transmission curve 2 is obtained for a DMS filter as shown in figure 1, but having a continuous finger period profile. In this structure, the finger at the end is not broadened, but the greater separation between the two structures on both sides of the junction is distributed over the respective outermost three fingers, so that a locally increased finger period occurs at the junction. As can clearly be seen from the measured curve 2, a DMS filter designed in this way has an even worse transmission response than the filter shown in figure 1. The transmission curve 3, on the other hand, was measured with a DMS filter designed according to the invention, in which the finger period in the region of the junction of the two mutually shifted transducers (surface acoustic wave structures) has been reduced, with an additional finger being inserted, in comparison to the SAW filter which is known from figure 1. In this case, both the finger width and the finger spacing decrease continuously toward the junction, in both transducers. As figure 5 shows, such a filter designed according to the invention has a better transmission response, which is indicated by reduced attenuation and a more uniform transmission curve. The reduced attenuation, particularly in the region of the right-hand edge of the transmission curve, is achieved by the reduced scattering losses in the region of the junction.

Further parameters for designing DMS filters are specified as an exemplary embodiment in the

Year	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

Lithium tantalate LiTaO_3 with a 42° red YX crystal cut is used as the substrate. The metallization for the surface acoustic wave structures is applied with a thickness which amounts to 9 to 11 percent of the associated wavelength, for example 420 nm. This provides the required bandwidth of 35 MHz. The right-hand flank of the transmission curve of the filter, which is a result of the resonance between two transducers shifted through a value Δx with respect to one another, can be said to comply with the EGSM Specifications by selecting $\Delta x = (0.25 \pm 0.05)\lambda$. The quasi-periodic transition of the finger period between the two shifted transducers can be distributed over a total of five to eight fingers. The total number of electrode fingers in transducer A (see figure 1) is preferably chosen to be in the range from 27 to 35, and the total number of fingers in the transducers E1 and E2 to be in the range from 20 to 24. This results in a filter which is optimized in terms of ripple and flank gradient.

The selectivity required for EGSM is obtained with a filter having two tracks whose junction is designed according to the invention. The aperture is chosen to be between $50 \times \lambda$ and $70 \times \lambda$, in order to obtain input and output impedances of 50Ω .

The entire filter with a surface acoustic wave arrangement according to the invention may also be used in embodiments which can be operated symmetrically/asymmetrically. This means, inter alia, a filter in which an asymmetric signal is present at the input or at the output, that is to say in which one of the two connections is carrying a signal, while the other is connected to ground. At the other end of the filter, a symmetrical signal is present at the two connections, which has the same absolute amplitude at both connections, but with the opposite mathematical sign, or a phase difference of 180° .

A further application of the invention is in DMS filters which can be operated symmetrically/asymmetrically and in which the input and

output impedance differ. The input or output impedance can be adjusted by weighting or by vertical or horizontal splitting of the transducers into transducer element structures, as is proposed, for example, in the
5 two prior German Patent Applications 197 24 258.8 and 197 24 259.6.

It is also possible for the distances between the central interdigital transducer (A) and the two outer interdigital transducers (E1, E2) to be of
10 different magnitude.

A further refinement relates to a filter which is in the form of a two-track arrangement, with the finger periods p of the reflectors (R) in the two tracks being of different magnitude.

15 The invention can likewise be used in a resonator filter in which the junction between a mutually shifted transducer and reflector is designed according to the invention. For example, a reactance filter comprising a number of single-port resonators
20 connected in series and/or in parallel and having a junction between the different finger periods (p) of the interdigital transducer and reflector can be formed in at least one single-port resonator.

September 12, 2000 - 12 -
1998 P 2971 P

PCT/EP99/08074

P01,0105

JC18 Rec'd PCT/PTO 27 APR 2001

Patent claims

1. A surface acoustic wave arrangement having the following features:
- 5 - a piezoelectric substrate
- first and second surface acoustic wave structures (St1, St2) which are fitted on the substrate, are arranged one behind the other in the propagation direction of the surface acoustic waves, comprise
- 10 metallic fingers and have a first and second finger period (p), respectively,
- the two surface acoustic wave structures have a different phase and/or different finger period (p),
- fingers at the ends of the two surface acoustic wave
- 15 structures form a junction region from the first to the second surface acoustic wave structure,
- the local finger period (p) of the first surface acoustic wave structure initially decreases continuously in the junction region and finally rises
- 20 continuously again until the finger period of the second surface acoustic wave structure is reached.
2. The surface acoustic wave arrangement as claimed in claim 1,
- in which the junction region is formed by 5 to 8.
- 25 fingers at the ends of the two surface acoustic wave structures.
3. The surface acoustic wave arrangement as claimed in claim 1 or 2,
- in which at least one of the two surface acoustic wave
- 30 structures is in the form of an interdigital transducer (A, E).
4. The surface acoustic wave arrangement as claimed in claim 3,
- in which the second surface acoustic wave structure is
- 35 in the form of a reflector (R).

5. The surface acoustic wave arrangement as claimed in claim 1 or 2, in which the two surface acoustic wave structures are in the form of reflectors (R).

- 5 6. The surface acoustic wave arrangement as claimed in one of claims 1-5,

1998 P 2971 P

in which the width of the fingers of the surface acoustic wave structures initially decreases and then increases again in the junction region.

5 7. The surface acoustic wave arrangement as claimed in one of claims 1-6,
in which the surface acoustic wave structures have a metallization ratio η of 0.7 to 0.8.

8. The surface acoustic wave arrangement as claimed in one of claims 1-7,
10 which is in the form of a dual mode surface acoustic wave filter (DMS filter), with interdigital transducers which are used as input and output transducers being arranged between two reflectors in one acoustic track, and the surface acoustic wave structures being selected
15 from interdigital transducers and reflectors.

9. The surface acoustic wave arrangement as claimed in claim 8,
in which the reflectors are connected to ground.

10. The surface acoustic wave arrangement as
20 claimed in claim 8 or 9,
in which the metallization height of the surface acoustic wave structures is in the region from 9 to 11% of the wavelength, which is associated with the surface acoustic wave structures, of the surface acoustic
25 waves.

11. The arrangement as claimed in one of claims 1 to 10,
arranged on a 42° red YX-LiTaO₃ substrate or on a 36° red YX-LiTaO₃.

30 12. The arrangement as claimed in one of claims 1 to 11,
having three interdigital transducers (A, E1, E2) which are arranged one behind the other between two reflectors (R1, R2), with the central interdigital
35 transducer, which is connected to a first connection (OUT), having a total of 27 to 35 electrode fingers

AMENDED SHEET

1998 P 2971 P

while, in contrast, the two outer interdigital transducers (E1, E2), which are connected to a second connection (IN), have a total of 20 to 24 electrode fingers.

AMENDED SHEET

1998 P 2971 P

13. The arrangement as claimed in claim 12, in which the distances between the central interdigital transducer (A) and the two outer interdigital transducers (E1, E2) are of different magnitude.

5 14. The arrangement as claimed in one of claims 1-13,

which is in the form of a two-track arrangement, with the finger periods (p) of the reflectors (R) in the two tracks being of different magnitude.

10 15. The arrangement as claimed in one of claims 1-7,

which is in the form of a reactance filter with single-port resonators, with a junction between the different finger periods (p) of an interdigital
15 transducer and a reflector in at least one single-port resonator.

Abstract

Surface acoustic wave arrangement having at least two
5 surface acoustic wave structures.

In order to reduce scattering losses during the
transmission of a surface acoustic wave signal, the
invention proposes that the junction between two
10 mutually offset surface acoustic wave structures be
designed such that the finger period is reduced in the
region of the junction, and such that the finger period
varies continuously in the region of the junction.

Figure 3

1/3

FIG 1


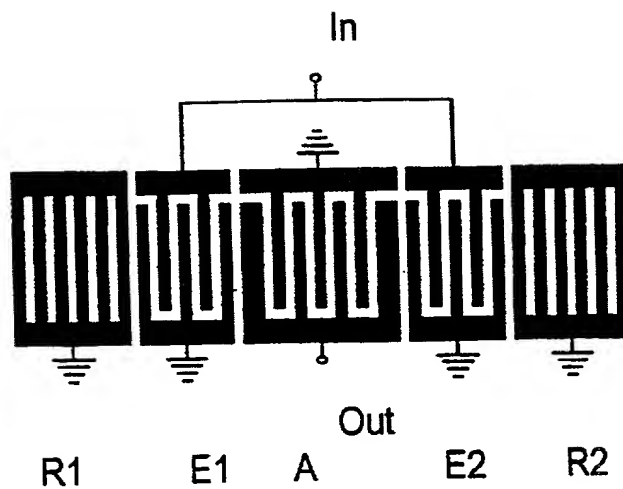


FIG 2

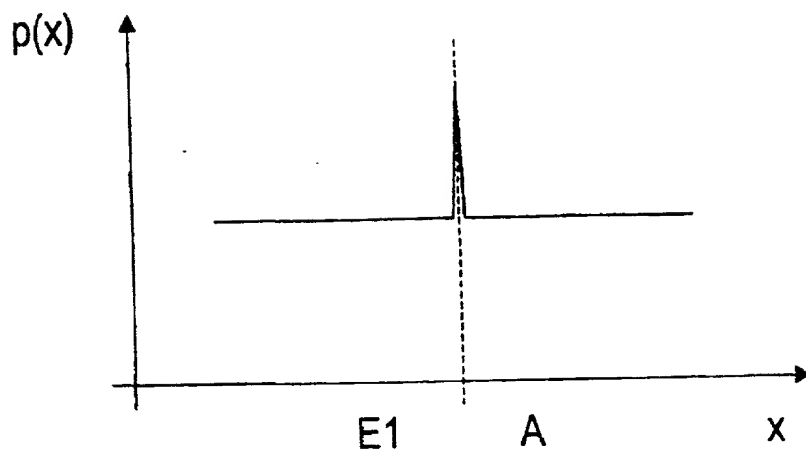

2/3

FIG 3



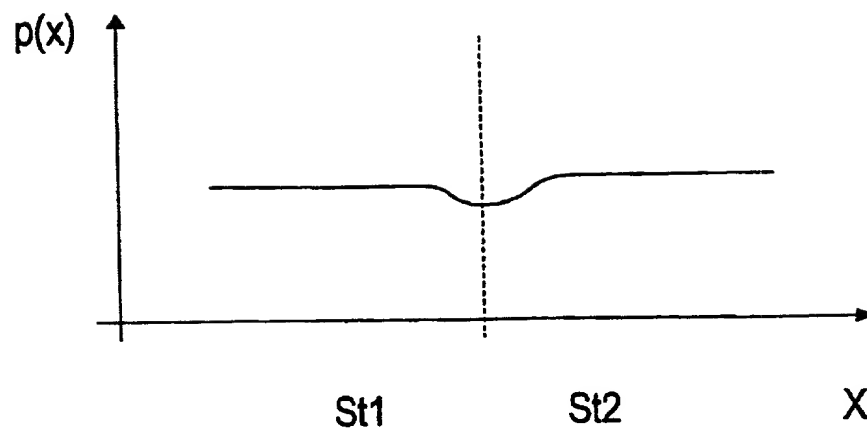


FIG 4

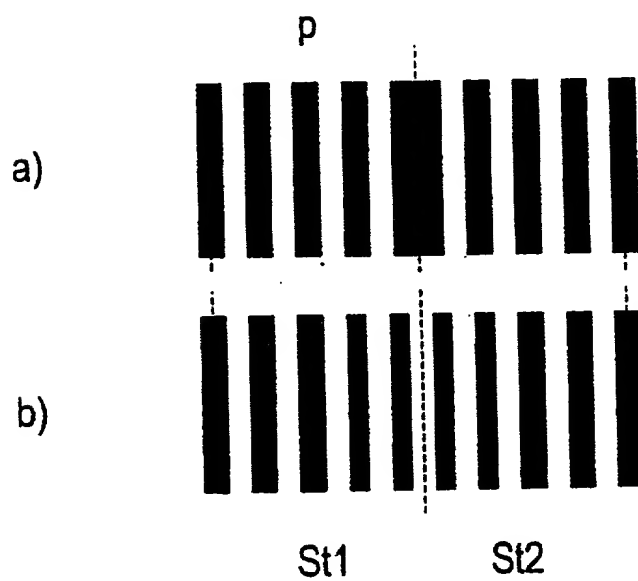

3/3

FIG 5

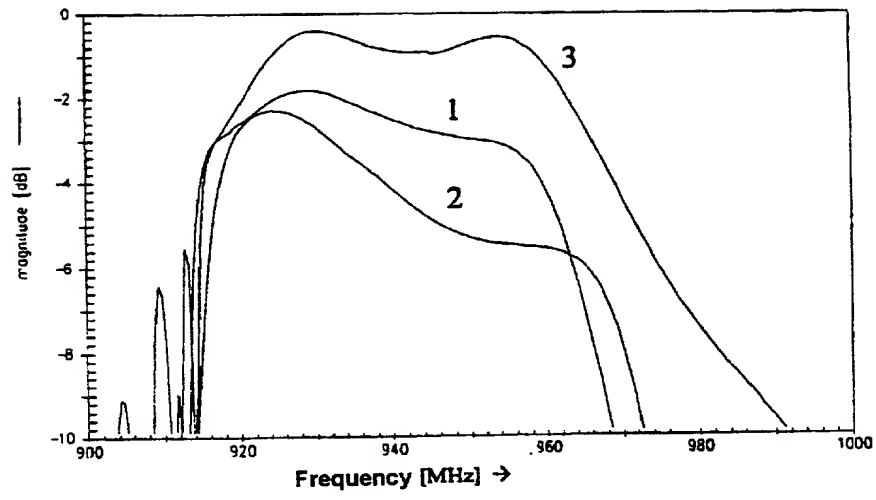

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY
(Includes Reference to PCT International Applications)

ATTORNEY'S
DOCKET NUMBER
P-01,0105

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.
I believe I am the original, first and sole inventor (If only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**"SURFACE ACOUSTIC WAVE ARRANGEMENT WITH AT LEAST
TWO SURFACE ACOUSTIC WAVE STRUCTURES"**

the specification of which (check only one item below):

- ☐ is attached hereto.
- ☐ was filed as United States application
Serial No. _____
on _____
and was amended
on _____ (if applicable).
- ☒ was filed as PCT international application
Number PCT/EP99/08074
on 26 October 1999
and was amended under PCT Article 19
on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (If PCT indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
Germany	198 49 782.2	28 October 1998	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

Combined Declaration For Patent Application and Power of Attorney (Continued) (Includes Reference to PCT International Applications)				ATTORNEY'S DOCKET NO. P-01,0105	
I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT International application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:					
PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:					
U.S. APPLICATIONS			STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENT ED	PENDING	ABANDONED	
PCT APPLICATIONS DESIGNATING THE U.S.					
PCT APPLICATION NO	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)			
POWER OF ATTORNEY: As a named inventor, I hereby appoint all Attorneys identified by United States Patent & Trademark Office Customer Number 26574, who are all members of the Firm Schiff Hardin & Waite.					
Send Correspondence to:		Customer No. 26574		Direct Telephone Calls to:	
SCHIFF HARDIN & WAITE Patent Department 6600 Sears Tower, Chicago, Illinois 60606-6473				(312) 258-6781	
1-00 2 0 1	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME	
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP	
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY	
2-00 2 0 2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME	
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP	
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY	
3-00 2 0 3	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME	
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP	
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY	
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.					
SIGNATURE OF INVENTOR 201 <i>Thomas Bauer</i>		SIGNATURE OF INVENTOR 202 <i>Ulrike Kovacs</i>		SIGNATURE OF INVENTOR 203 <i>Ulrike Rösler</i>	
DATE <i>March 12, 2001</i>		DATE <i>March 12, 2001</i>		DATE <i>March 12, 2001</i>	

**Combined Declaration For Patent Application and Power of Attorney
(Continued)**

(Includes Reference to PCT International Applications)

ATTORNEY'S DOCKET NO.
P-01,0105

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application(s) and the national or PCT International filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS			STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE		PATEN TED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.					
PCT APPLICATION NO	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)			

POWER OF ATTORNEY: As a named inventor, I hereby appoint all Attorneys identified by United States Patent & Trademark Office Customer Number 28574, who are all members of the Firm Schiff Hardin & Waite.

Send Correspondence to:

SCHIFF HARDIN & WAITE
Patent Department
6600 Sears Tower, Chicago, Illinois 60606-6473

Direct Telephone Calls to:
(312) 258-5781

2 0 4	FULL NAME OF INVENTOR	FAMILY NAME <u>Reile</u>	FIRST GIVEN NAME <u>Werner</u>	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY <u>D-80636 München DEX</u>	STATE OR FOREIGN COUNTRY <u>Germany</u>	COUNTRY OF CITIZENSHIP <u>Germany</u>
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>Klarastrasse 5</u>	CITY <u>D-80636 München</u>	STATE & ZIP CODE/COUNTRY <u>Germany</u>
2 0 5	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
2 0 6	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 204 <i>Reile</i> <i>X Werner Reile</i>	SIGNATURE OF INVENTOR 205	SIGNATURE OF INVENTOR 206
DATE <i>X March 12, 2009</i>	DATE	DATE